


Bitzer 4G.2Y

Specifications

Brand	Bitzer
Type	4G.2Y
Refrigerant	Freon
kW at 0°C/+40°C	70,9
kW at -5°C/+40°C	58,7
kW at -10°C/+40°C	48,2
kW at -20°C/+40°C	31,2
kW at -30°C/+40°C	18,8
kW at -40°C/+40°C	10,1
kW at -45°C/+40°C	6,8
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Oil separator	✓
Sight Glass	✓
Solenoid Valve	✓
m3 / h	102,0
Remarks	Y.o.b. 2000
Sizes	1100x700x920 mm (LxWxH)
Stock	1


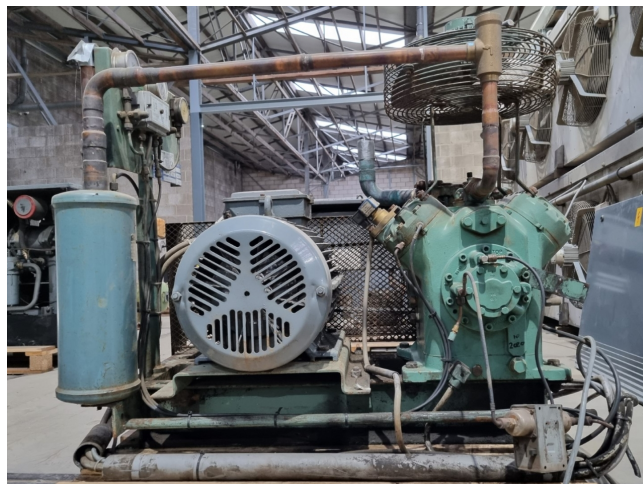




Description

Used Bitzer 4G.2Y

Used Bitzer 4G.2Y open-type reciprocating compressor on Freon. Complete with a MEZ F160L04 202H electric motor: 50 Hz - 15 kW - 1445 RPM, AC&R S-5692 oil separator with a volume of 6,7 liter and pressure and safety switches/gauges.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

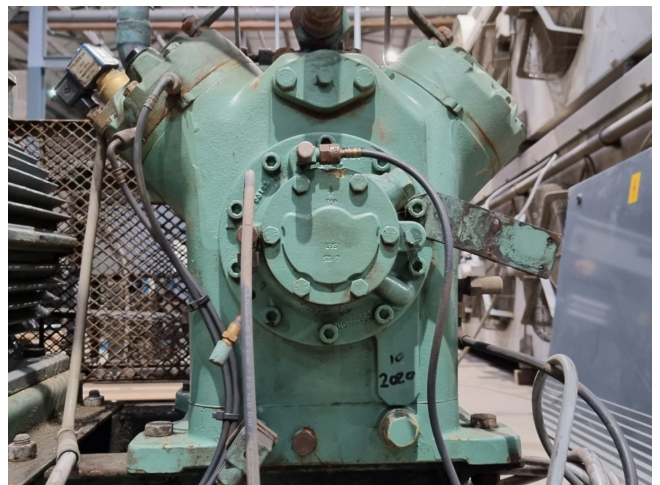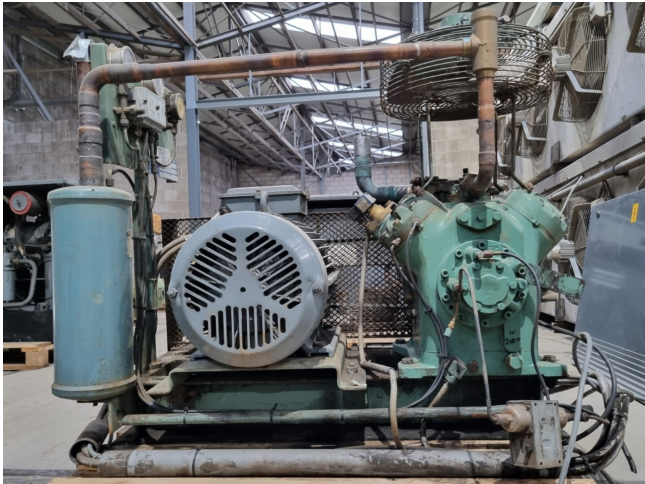

		Typ 4G.2 Y
BITZER KÜHLMASCHINENBAU GMBH		S.Nr. 65912338
Made in E.C.		
Fördervolumen		Drehzahl
m³/h		min⁻¹
43,7-102,0		750-1750
ND/HD max. 19 / 25 bar		CE
378 027-01		

